
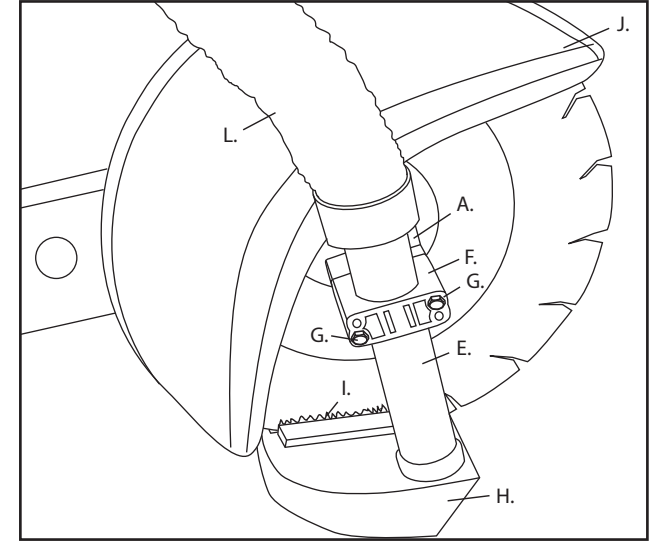
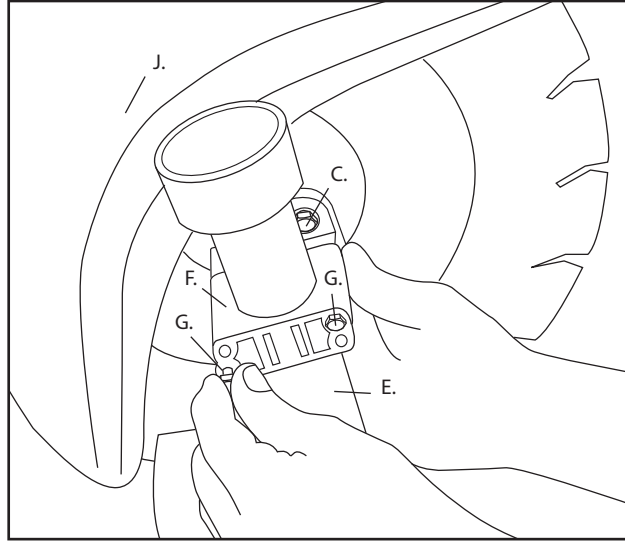


Instructions for mounting the Saw Muzzle™ Type E

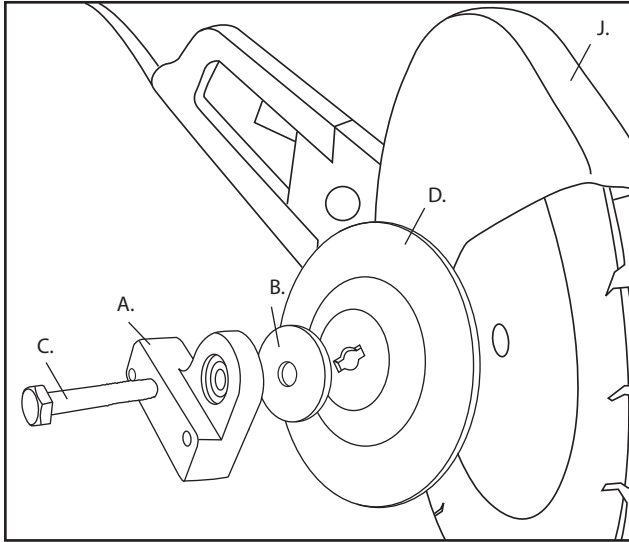

1. Remove the arbor bolt (C) from the saw. Save for when the saw is used without the Saw Muzzle™ Type E.
2. Leave the 3" stabilizer washer (D) on the blade.
3. Remove the Saw Muzzle Type E and the mounting clamp (F) from the bearing carrier (A) by removing the two 6mm mounting clamp bolts (G).
4. Insert the new arbor bolt (C) through the bearing carrier (A) and then through the spacer (B) so that the recessed side of the spacer faces the blade.
5. Attach the bearing carrier assembly to the saw with the arbor bolt (C) and tighten the new arbor bolt (C) to manufacturers specifications.
6. Slide the blade between the blade brushes (I) of the collection chamber (H).

7. Align the mounting clamp (F) on the vacuum pickup tube (E) making certain that the 6mm mounting clamp bolts (G) are going through the upper right and lower left holes of the mounting clamp .
8. Attach the mounting clamp (F) to the bearing carrier (A) making the bolts finger tight.
9. Adjust the vacuum pickup tube (E) up or down so that the blade almost touches the back of the collection chamber (H).
10. Tighten the mounting clamp bolts (G) evenly. Do not over-tighten.
11. Insert the vacuum hose (L) into the top of the vacuum pickup tube (E).
12. Use the releasable cable tie (supplied) to attach the vacuum hose (L) to the power cord of the saw, leaving a loop of hose between the top of the vacuum pickup tube (E) and the point where the hose (L) is attached to the power cord.

- | |
|---|
| <p>A. Bearing carrier
 B. Spacer
 C. New arbor bolt
 D. Stabilizer washer
 E. Vacuum pickup tube
 F. Mounting clamp
 G. Mounting clamp bolts
 H. Collection chamber
 I. Blade brushes
 J. Blade guard
 K. Releasable cable tie
 L. The vacuum hose (not supplied)</p> |
|---|

Notes:

The Saw Muzzle Type E is most efficient when the saw is pulled toward the operator.

The Saw Muzzle Type E requires a 2HP vacuum that uses a separate, disposable collection bag, has 120 CFM of airflow and at least 72 inches of water column. You may call us for suggestions on reasonably priced vacuums that are compatible with the Saw Muzzle Type E. The Saw Muzzle Type E will allow approximately a 3 1/2" depth of cut when used with a 14" blade and the standard blade guard. Removing a notch approximately 2" from the front of the blade guard will allow the operator to attain a full 5" depth of cut.